


IBON


ILJIN Polycrystalline Cubic Boron Nitride

Grade ■ Carbide backed ■ Solid form

Type	Grade	SEM	cBN size(μm)	cBN content(%)	Major binder	Hardness (Hv)	Characteristics & Applications	
■	SB100		10	93	Aluminum nitride	3,700-3,900	Extreme wear resistance due to high content of coarse cBN grain	Rough machining of cast iron and powder metal alloys
■	SB95S2		2	95	Titanium alloy	3,700-3,900	Extreme wear resistance and high chipping resistance due to high content cBN and fine cBN size	Machining most kinds of cast iron and powder metal alloy
■	SB950		2	95	Tungsten cobalt alloy	3,700-3,900	Extreme wear resistance and high chipping resistance due to high content cBN and fine cBN size	Machining most kinds of cast iron and powder metal alloy
■	SB95N		3	95	Titanium alloy	3,700-3,900	Extreme wear resistance due to high content of cBN and metal binder	Machining most kinds of cast iron
■	SB800		3	80	Titanium carbide	3,500-3,700	Combination of wear resistance and thermal properties	Machining non-homogeneous cast iron and ductile cast iron
■ ■	SB700 SB\$700		<1	65	Titanium nitride	2,600~2,800	High degree of toughness due to fine cBN and ceramic binder matrix	Heavy interrupted machining of hardened steel
■ ■	SB650 SB\$650		3	65	Titanium nitride	2,700-2,900	Combination of wear resistance and thermal stability	High speed and interrupted machining of hardened steel
■ ■	SB630 SB\$630		1	60	Titanium nitride	2,500-2,700	Combination of wear resistance and impact strength	General use in continuous and light interrupted machining of hardened steel
■ ■	SB600 SB\$600		1	60	Titanium carbonitride	2,500-2,700	Combination of wear resistance and thermal stability	General use in continuous and light interrupted machining of hardened steel
■ ■	SB500 SB\$500		1	50	Titanium carbide	2,500-2,700	Good thermal stability and crater wear resistance	High speed continuous machining of hardened steel

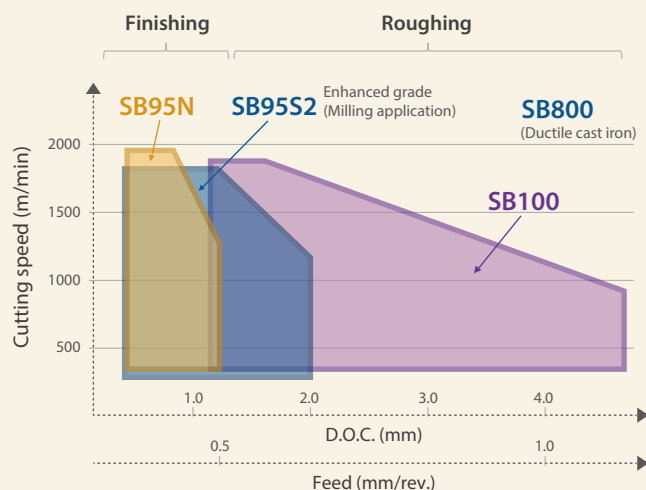

Cutting condition of PCBN with high cBN content

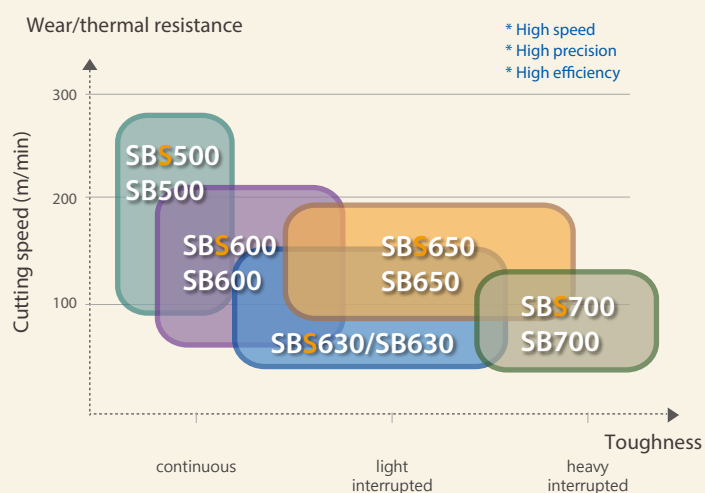

Cutting condition of PCBN with low cBN content


Cast Iron

SB95N

ILJIN Diamond

Introduction

- cBN size: $3\mu\text{m}$
- Major binder: Titanium alloy
- cBN content: ~95%
- Hardness: 3,700~3,900(Hv)


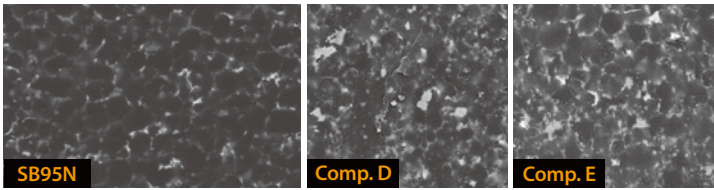


Characteristics

- Extreme wear resistance due to high content of cBN

Performance - Continuous turning

Material	Gray cast iron
Speed	500m/min
D.O.C	0.25mm
Feed	0.1mm/rev
Coolant	Dry
Insert type	CNMA120408
Holder type	PCLNR2525-M12

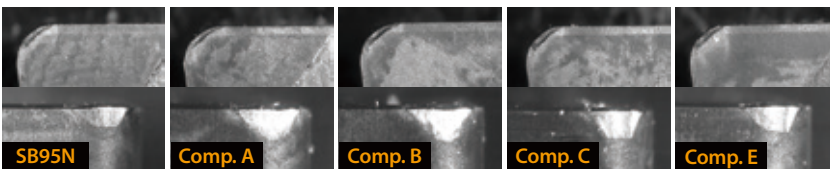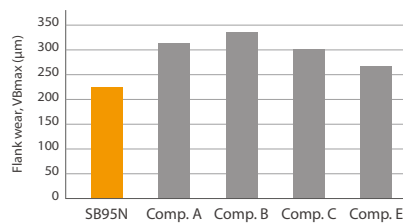


SB95S2

ILJIN Diamond

Introduction

- cBN size: $2\mu\text{m}$
- Major Binder: Titanium alloy
- cBN content: ~95%
- Hardness: 3,700~3,900(Hv)

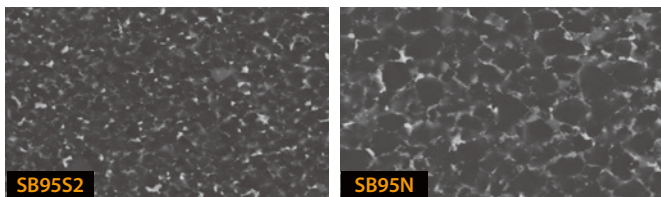

Characteristics


- Extreme wear resistance and high chipping resistance due to high content cBN and fine cBN size

SB100

ILJIN Diamond

Introduction

- cBN size: $10\mu\text{m}$
- Major Binder: Aluminum nitride
- cBN content: ~93%
- Hardness: 3,700~3,900(Hv)

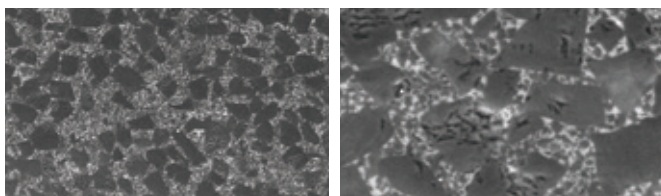


Characteristics

- Extreme wear resistance due to high content of coarse cBN grain

Application guideline

- Machining most kinds of cast irons
- Gray cast iron
 - V : 500~1,500 m/min
 - D.O.C : 0.2~1.0 mm

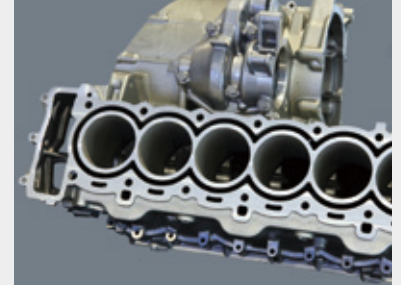

Cylinder bore finish boring




Break Disc

- Powder metal
 - Hardness : <HRC 45

Exhaust
SB700, SB500

InTake
SB95N, SB95S2

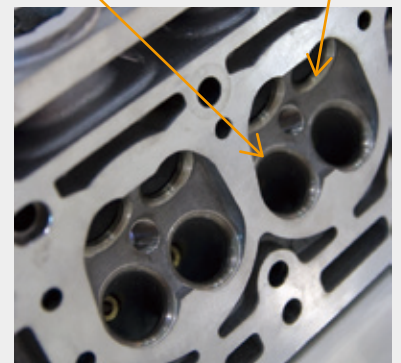

Cylinder head surfacing

- Hardened steel
 - Hardness : <HRC 45
 - V : 100~200m/min
 - Interrupted cutting



CV joint (outer race & inner race)

Hardened Steel

SB650 / SBS650


ILJIN Diamond

■ **SB650** Carbide backed

■ **SBS650** Solid form

■ Introduction

- CBN size: 3 μ m
- CBN content: ~65%
- Major binder: Titanium nitride
- Hardness: 2,700~2,900(Hv)


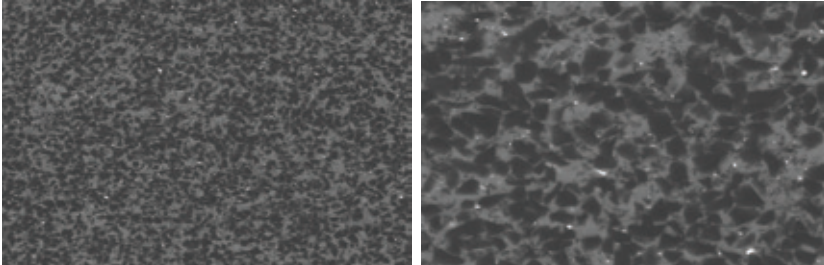


■ Characteristics

- Combination of wear resistance and thermal stability

■ Performance - Interrupted turning1


Material	Alloy steel / 42CrMo4 (SCM440H), HRc 58
Speed	200m/min
D.O.C	0.5mm
Feed	0.3mm/rev
Coolant	Dry
Insert type	CNGA120408
Holder type	PCLNR2525-M12

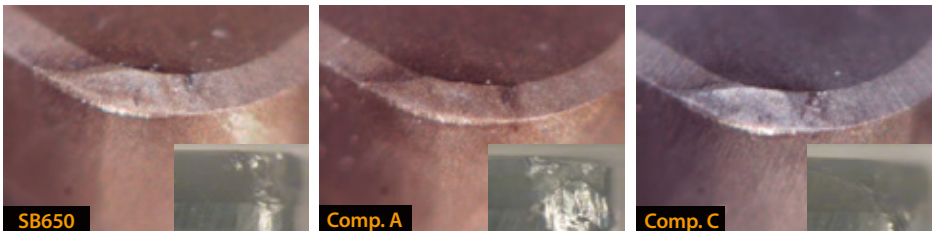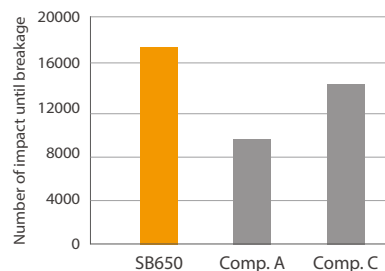

■ Performance - Interrupted turning2

Material	SCM440(H)
Size	Ø100 × 300 mm
Hardness	55~60 HRc
Path	Flank wear after 10 path cutting
Designation	CNGA120408 T01225
Speed	150m/min
D.O.C	0.4mm
Feed	0.1mm/rev
Coolant	Dry

	Cutting time	Cutting length	Flank wear
SB650	17.90 min.	2.68 km	1,400 μ m
Comp. A	6.02 min.	0.90 km	2,000 μ m

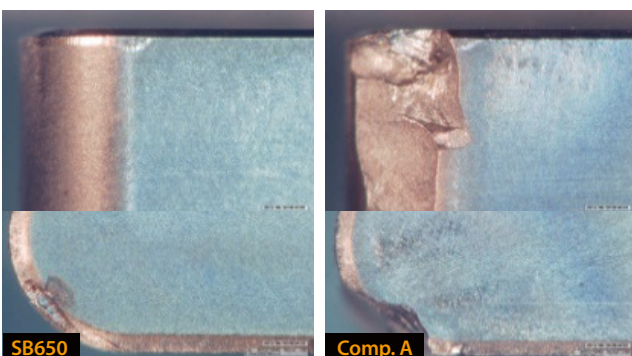

■ Application guideline

- High speed and interrupted machining of hardened steel
- Good chucking system (no chattering)
- General interrupted cutting
- Hardened steel
 - Hardness : HRc 60
 - V : 150~200m/min
 - D.O.C : 0.3 ~0.5mm



Alloy steel interrupted turning



Interrupted turning

Hardened Steel

SB600 / SBS600

ILJIN Diamond

▪ **SB600** Carbide backed


▪ **SBS600** Solid form

Introduction

- cBN size: 1 μ m
- cBN content: ~60%
- Major binder: Titanium carbonitride
- Hardness: 2,500~2,700(Hv)

Characteristics


- Combination of wear resistance and thermal stability
- General use in continuous and light interrupted machining of hardened steel

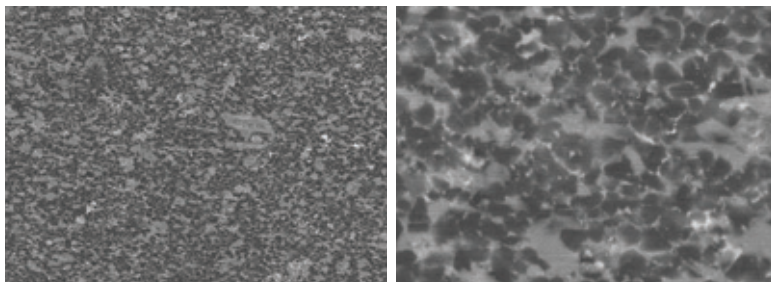

Performance - Cross section, Internal rough machining


Material	Annulus gear(Ø145) SCr420H
Hardness	>HV650
Speed	80m/min
N	180 rev/min
Feed	0.12mm/rev
Coolant	Wet

Grade	Tool life
SB600	4,000
Comp. S	2,500

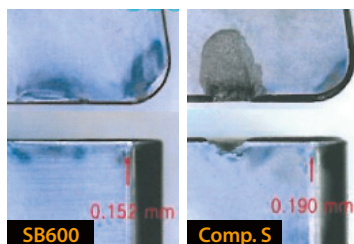

Application guideline

- Continuous light interrupted machining of hardened steel

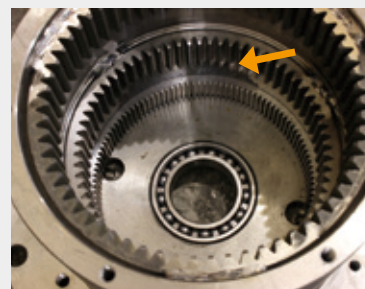

Annulus gear

Powder Metal

SB700 / SBS700

ILJIN Diamond

▪ **SB700** Carbide backed


▪ **SBS700** Solid form

Introduction

- cBN size: <1 μ m
- cBN content: ~65%
- Major binder: Titanium nitride
- Hardness: 2,600~2,800(Hv)


Characteristics

- High toughness with fine cBN size and ceramic binder matrix

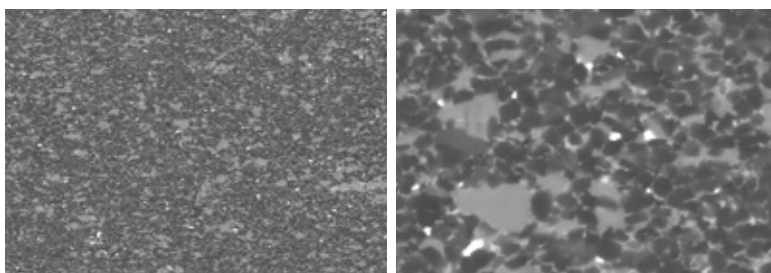

Application guideline

- Heavy interrupted machining of hardened steel
- Powder metal
 - Hardness : >HRc 45

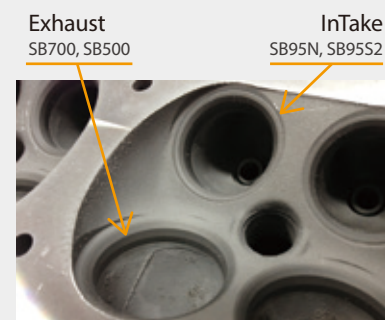

VCR machining